


EK - GENERATORI MOBILI D'ARIA CALDA A CORRENTE ELETTRICA ELECTRICAL MOBILE SPACE HEATERS

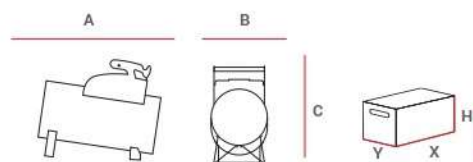

MOD	PESI E DIMENSIONI MACCHINA WEIGHTS AND DIMENSIONS MACHINE			IMBALLO PACKAGING				
	A	B	C	Netto/Net	X	Y	H	Lordo/Gross
	[mm]	[mm]	[mm]	[kg]	[mm]	[mm]	[mm]	[kg]
EK 3 C	367	180	280	5	392	277	217	6
EK 10 C	505	277	511	13	542	387	315	14
EK 15 C	575	277	511	15	610	387	315	16
EK 22 C	700	317	538	21	732	432	350	22
EK 30 C	899	558	706	41	940	600	680	48

		EK 3 C	EK 10 C	EK 15 C	EK 22 C	EK 30 C
codice - code		06EK101	06EK102	06EK103	06EK104	06EK106
potenza term. nominale max max rated heat power	Hs [kW]	3	10	15	22	30
	Hs [kcal/h - BTU/h]	2.580 - 10.235	8.600 - 34.120	12.900 - 51.185	18.915 - 75.065	25.818 - 102.455
potenza term. nominale min. min rated heat power	Hs [kW]	1,5	6,6	10	15	20
	Hs [kcal/h - BTU/h]	1.290 - 5.185	5.675 - 22.520	8.600 - 34.120	12.900 - 51.185	17.212 - 68.304
rendimento - heat efficiency	[%]	100	100	100	100	100
portata d'aria - air flow	[m³/h]	450	1.500	2.000	3.050	5.100
salto termico - temperature rise	a 20°C [°C]	44,5 - 32	48,3 - 30,5	54,3 - 35	56 - 38	56 - 38
corrente massima - current max	[A]	13 - 6,5	13,6 - 7,1	21 - 13,8	30 - 21	43 - 28
alimentazione elettrica - electrical power	[V - ph - Hz]	230 - 1 - 50	400 - 3 - 50	400 - 3 - 50	400 - 3 - 50	400 - 3 - 50/60
connessioni - connections	[n°]	-	3P+↓ 3P+↓+N	3P+↓ 3P+↓+N	3P+↓ 3P+↓+N	3P+↓
quantità per pallet - pallet quantities	[pz - pcs]	72	36	24	18	6

Possibilità di impilamento (EK 10-15-22-30)
Possibility to stack-ability (EK 10-15-22-30)

