

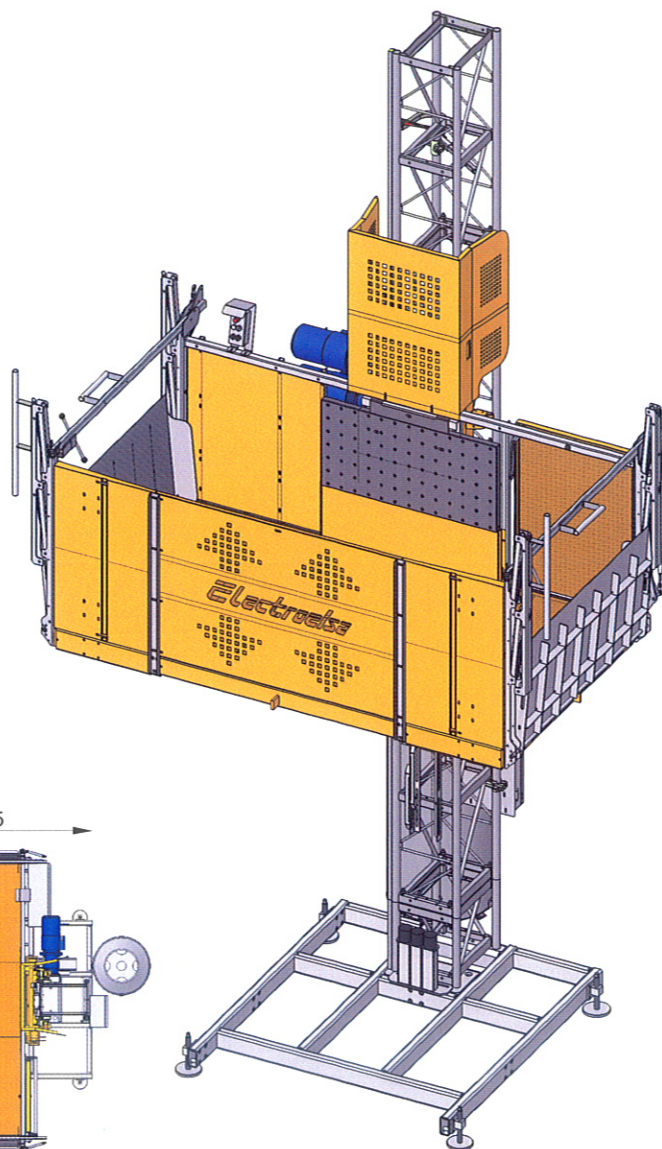


# Electrolift

**EHPM 2500/10**  
**EHM 2500/10**

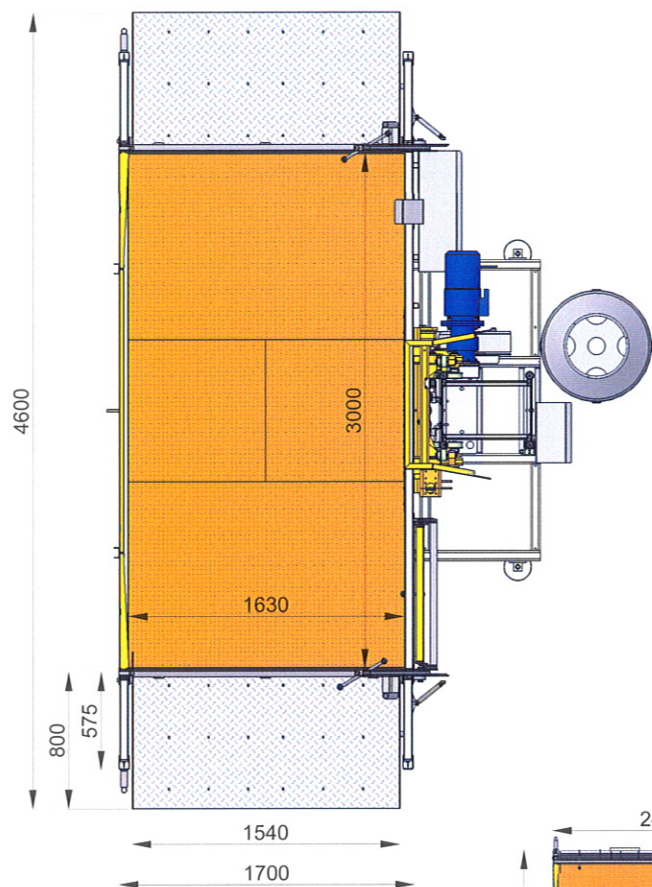

|   |                 |             |
|---|-----------------|-------------|
|   | 1300 kg trifase | <b>EHM</b>  |
| 1 | +1200 kg        | <b>EHPM</b> |
| 2 | +1100 kg        |             |
| 3 | +1000 kg        |             |
| 4 | +900 kg         |             |
| 5 | +800 kg         |             |
| 6 | +700 kg         |             |
| 7 | +600 kg         |             |
| 8 | +500 kg         |             |

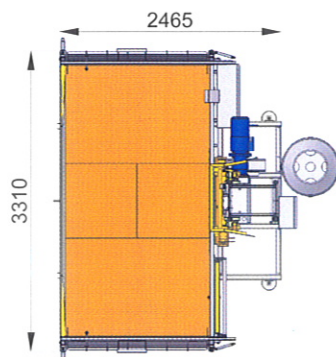


**PIATTAFORMA DI TRASPORTO / MONTACARICHI**  
**TRANSPORT PLATFORM / MATERIAL HOIST**

| Dati tecnici                        | Technical Data               | Données Techniques                 | Datos Tecnicos              | EHPM 2500/10 trifase | EHM 2500/10 trifase |
|-------------------------------------|------------------------------|------------------------------------|-----------------------------|----------------------|---------------------|
| Capacità di carico                  | Capacity                     | Charge Nominale                    | Capacidad de carga          | 1300 kg              | 1300 kg             |
| Velocità di sollevamento            | Lifting speed                | Vitesse de lévage                  | Velocidad de elevación      | 12 m/min             | 20 m/min            |
| Massima altezza ancorata            | Max anchored height          | Hauter max avec ancrages           | Altura max con anclajes     | 120 m                | 120 m               |
| Dimensioni interne cesta            | Platform dimensions          | Dimensions du plancher             | Dimensiones de cabina       | 3,08 x 1,64 m        | 3,08 x 1,64 m       |
| Tensione alimentazione              | Input power range            | Tension d'alimentation             | Tensión de red              | 380/415 V 50/60 Hz   | 380/415 V 50/60 Hz  |
| Interruttore protezione linea       | Protection switch            | Interrupteur de protection         | Interruptor de protección   | 25 A                 | 32 A                |
| Potenza servizio continuo           | Power of the motors          | Puissance des moteurs              | Potencia de motorreductores | 2 x 3 kW             | 2 x 4 kW            |
| Corrente di spunto                  | Starting current             | Ampérage au démarrage              | Intensidad de arranque      | 90 A                 | 130 A               |
| Minima potenza di linea consigliata | Minimum line power suggested | Min. puissance de ligne conseillée | Min. potencia de linea      | 10 kW                | 12 kW               |


# Electrolise

**EHPM 2500/10**  
**EHM 2500/10**

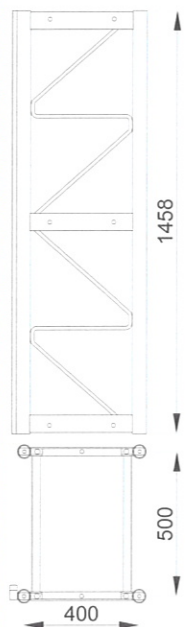


Compatibile con:  
*Interchangeability:*

EHM 2500/10  
EHM 2500/15  
EHM 2500/25  
EHM 2500/35  
EHPM 2500/10  
EHPM 2500/15  
EHPM 2500/25  
EHPM 2500/35  
EHP 1200  
EHP 1500

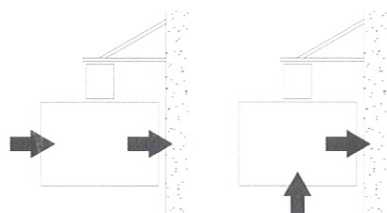


Configurazioni d'accesso possibili  
*Possible access configurations*

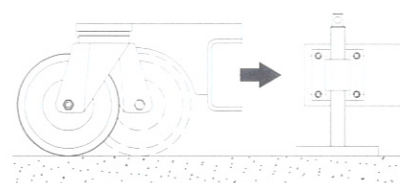

Kit ruote pivotanti  
per movimentazione a terra  
*Rotating wheel kit  
for quick positioning*



Quattro vitoni di livellamento  
*Four levelling screw-jacks*

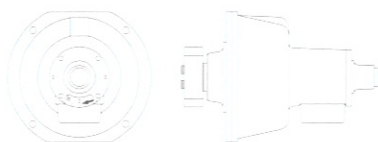

Freno d'emergenza  
ad arresto progressivo  
*Overspeed safety device  
with progressive stop*

